


## T4 - Manual

Thank you for choosing a product from Standby.


### Technical Data

Description	Units
Housing	PC/PBT
Cable length	50 cm
Supply voltage	+10-30VDC
Dimensions	126 mm x 87 mm x 19,5 mm
Recommended fuse	1A
Interface	CAN
Ambient temperature	
- Operating	-20° C to +70° C
- Storage/transport	-30° C to +80° C
Current consumption max	260mA at operation (1mA at standby mode)
Enclosure rating	IP65
Tests performed	Tested according to applicable parts of SS-ISO_16750-3 and SS-ISO_16750-4_2010
Approvals	ECE R10



### Included

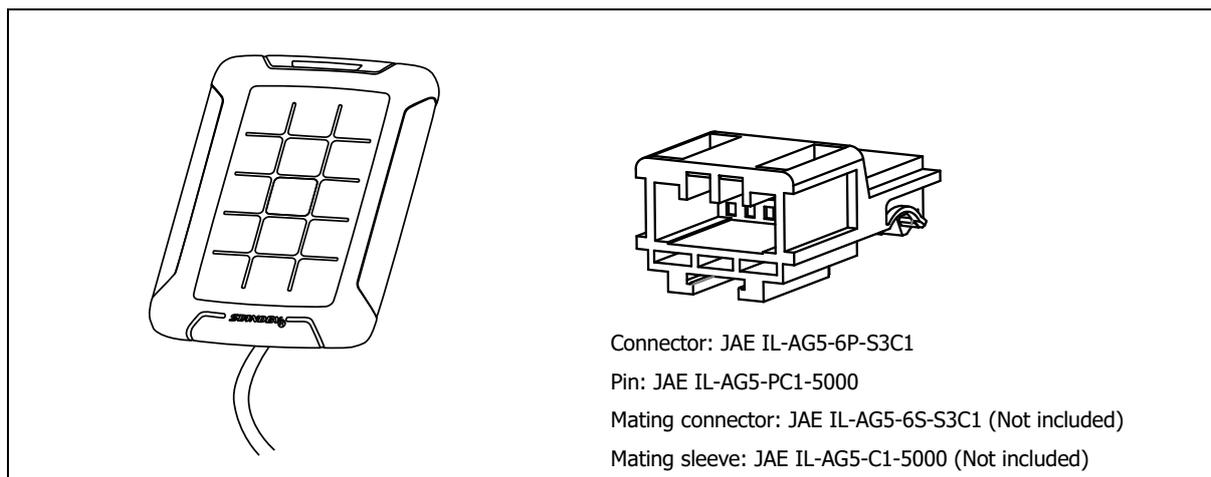


### Connection

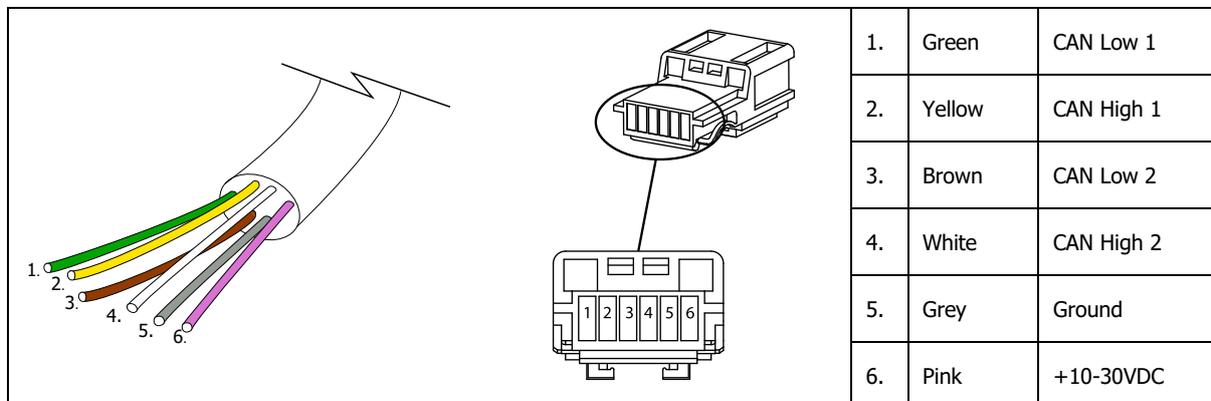

**Installation**

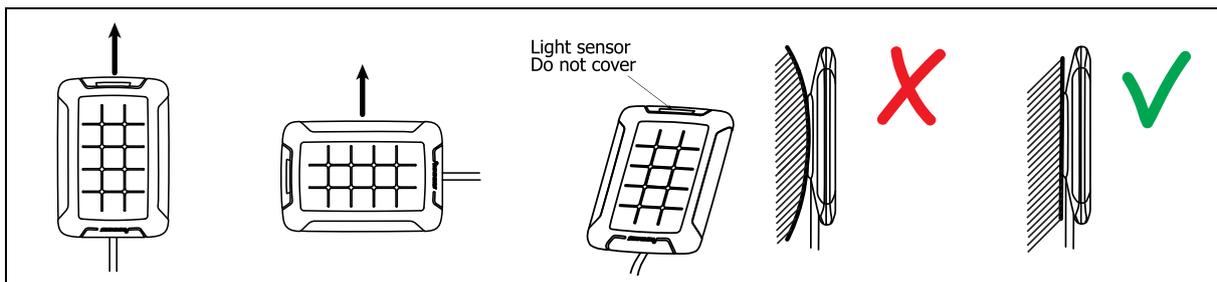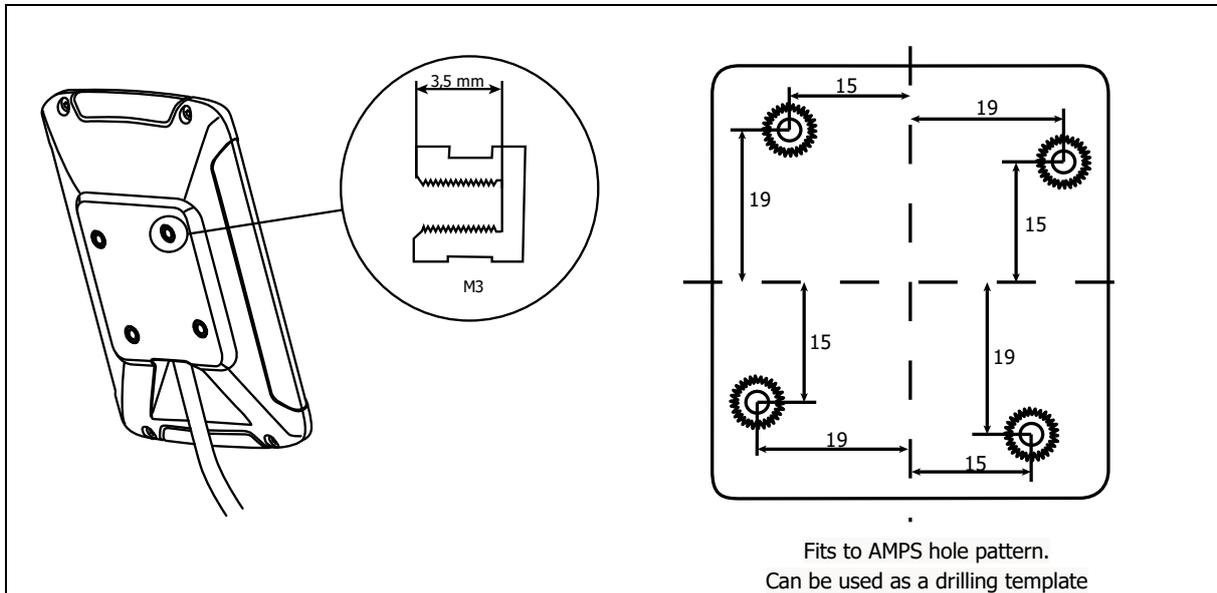

**Cleaning Instruction**

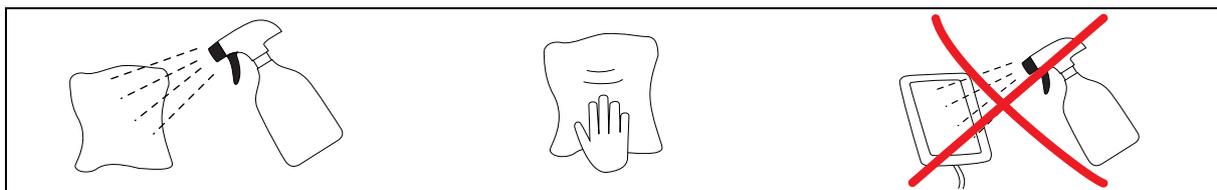

- Switch off the screen / device and wait for it to cool down
- Use a clean microfiber cloth. Avoid rough cloths, towels, paper towels and similar items.
- Moisten the microfiber cloth with a little water, for stubborn stains a screen cleaner designed for computer screens can be used.
- Wipe slow and gentle to avoid damage, wipe dry with a dry microfiber cloth.
- Do not spray water / screen cleaner directly on the unit. Never use a soaked cloth. This prevents moisture from entering the unit.

**Compatible Products**

For more information regarding compatible products: [www.standbygroup.se](http://www.standbygroup.se)

*Standby will not be held liable for improper installation or use of this product. Please follow all instructions provided. Professional advice and proper installation of the Standby products by an authorized Standby Partner are recommended to provide maximum safety and function*